COMPACT DESIGN, **BIG PERFORMANCE**

GIANT® BY TOBROCO

GS960T SKID-STEER



TYPE

GS960T

Service weight: 1,036 kg | Engine power: 25 HP / 17,5 kW

SKID-STEER AT A GLANCE

DUALPILOT CONTROL


The GS960T is equipped with DualPilot, an ergonomic and intuitive operator console. Forward and reverse driving is handled with the left hand via a central handle that links both drive levers, allowing speed, driving direction and steering to be managed in a single motion. The right hand operates a joystick for lifting the boom and tilting the bucket. This layout enables driving and hydraulic functions to be controlled simultaneously and smoothly, contributing to a comfortable and efficient working experience.








In Flex Flow low-speed mode, maximum flow is directed to front attachments for efficient mowing and sweeping

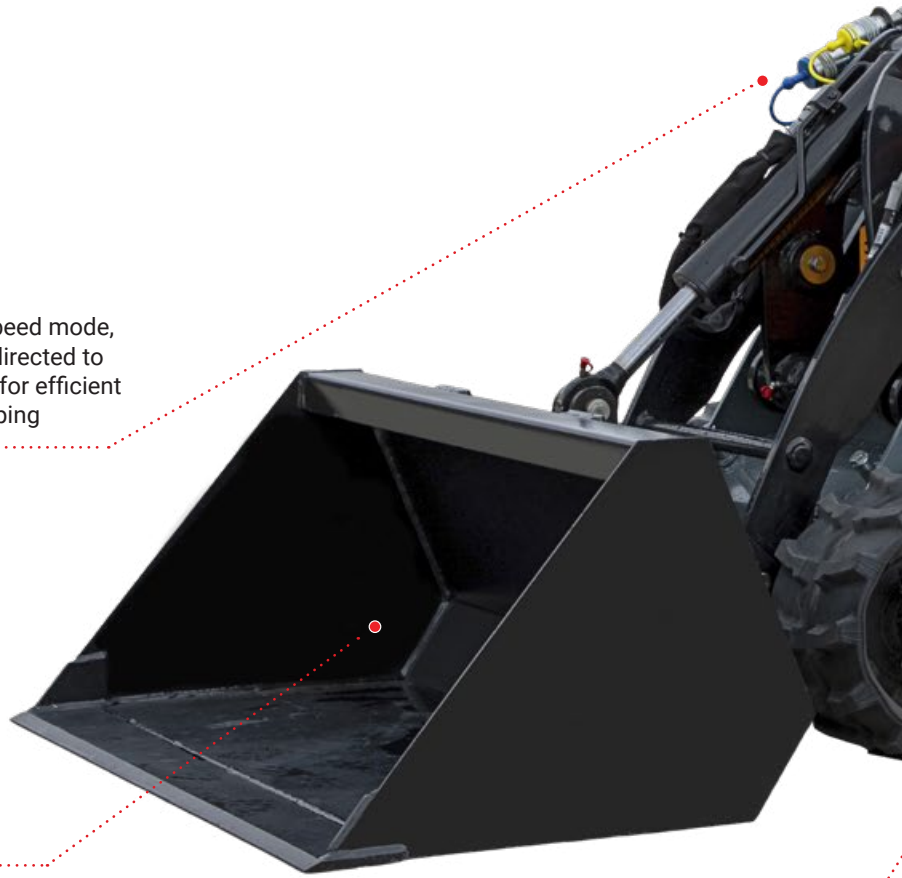

Maximize versatility on the job site! A hydraulic quick hitch is featured as standard, allowing to quickly swap attachments and tailor the machine to your specific applications.

The GS960T is equipped with 230 mm wide tracks, providing greater ground contact, reduced ground pressure, and improved traction. Also available with 180 mm wide tracks

A tandem pump enables the use of various hydraulically driven attachments. With a maximum capacity of 44 liters per minute at 180 bar, it is electrically switchable for optimal control. A oil cooler ensures smooth operation and a constant oil temperature

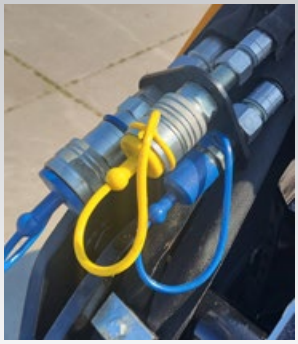







CONTROLLED DECELERATION

The softbrake delivers smooth and controlled deceleration. Whether operating with or without a load, during forward and reverse driving, it ensures precise handling and effortless operation.



The dipstick is easily accessible, allowing quick and convenient daily engine oil checks


GIANT
GIANT

SPECIFICATIONS


TYPE SKID-STEER ON TRACKS	GS960T
Service weight [1]	1.036 kg
Lifting capacity	576 kg
Tipping load [2]	970 kg
DIMENSIONS AND SPEED	
Lifting height [2]	2.030 mm
Length without bucket	1.460 mm
Width on standard tracks	1.000 mm
Standard tracks	Tracks 230 (100 cm)
Travel speed	Two-speed drive: 0–3 / 0–6 km/h
ENGINE	**Kubota D902 (Stage V)**
Cylinder	3
Power	25 HP / 17,5 kW
Type	Diesel
Fuel tank capacity	23 l
Oil capacity	41 l
POWERTRAIN	
Type	Hydrostatic drive on tracks
Control	DualPilot
Final Drive	2 heavy wheel motors
Driving hydraulic	180 bar
Working hydraulics	44 ltr/min (180 bar)


[1] *Measured with bucket*
[2] *Measured with pallet forks against the front plate*
[3] *Measured with standard tracks*

STANDARD MACHINE FEATURES	GS960T
1x Double acting hydraulic function on lifting arm, mechanically operated	Std
Hip bracket adjustable	Std
Parallel guidance on lifting arm	Std
Boom float function for ground following	Std
Counterweights integrated into the mudguards	Std
Height-adjustable suspended driver's platform	Std
Hand throttle	Std
Flex Flow function	Std
Tandem pump (electrically switchable)	Std
Leak oil connection at front	Std
Free hydraulic return	Std
Oil cooler	Std
Softbrake	Std
External jump-start connection	Std
Giant Compact hitch hydraulic	Std
Lifting eyes	Std

TIPPING LOADS	GS960T
S	1.043 kg
T	970 kg
U	525 kg
V	360 kg
W	2.267 kg
X	736 kg
Y	439 kg


Tipping load in kg, in straight position, without additional counterweights

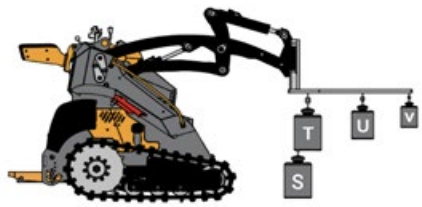

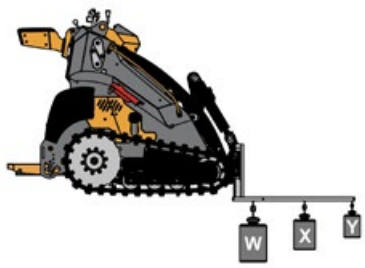

AVAILABLE OPTIONS

MEASUREMENTS	GS960T
A	830 mm
B	1.460 mm
C	2.230 mm
D	320 mm
E	1.320 mm
F	1.080 mm
G	1.450 mm
H	2.030 mm
I	2.350 mm
J	41°
K	33°
L	36°
M	18°
N	-
O	240 mm
Overall width	900 mm

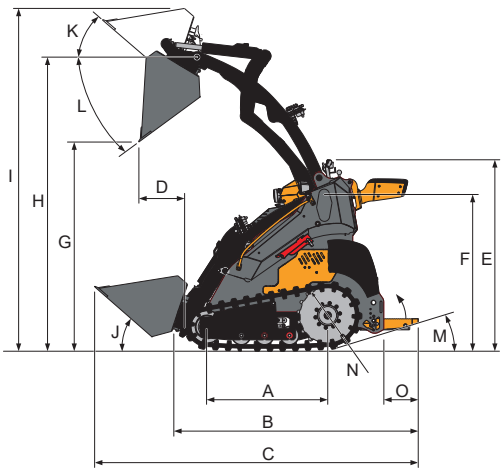

OPTIONS
Hydraulic function locking
Tracks 180 cm
Non-marking tracks
Counterweight 60 kg
Engine heating
2x Working light (LED) front, left and right on chassis [4]
12 Volt socket, 3-pin [4]

[4] Dealer-installed option

TRACKS



TRACKS 180
(90 cm)



TRACKS 230
(100 cm)

BERNARD FREI
soulever ↑ déplacer → transporter
2114 Fleurier | Tél 032 867 20 20 | www.bernardfrei.ch

GIANT® BY TOBROCO

Tobroco-Giant
Sprendlingenstraat 57, 5061 KM Oisterwijk (The Netherlands)
Tel.: +31 (0)13-5211212 | Fax: +31 (0)13-5234045
Website: www.tobroco-giant.com | E-mail: info@tobroco.nl

www.instagram.com/tobrocogiant **www.facebook.com/tobrocogiant**
www.linkedin.com/company/tobroco-machines **www.youtube.com/tobrocogiant**

All technical data in this brochure refer to under Central European operating conditions tested series models and describe the standard functions. Specifications and their modes of operation, as well as accessories, depend on the model and the options of the product, as well as country-specific regulations in the country of sale. Images may show non - listed or non standard available products. The descriptions, illustrations, weights and technical data are not binding and are in accordance with the state of the art at the time of going to press. Changes in the design, equipment, optics and technology are due to the continuous development of its products without prior notice. Do you need special functions which are only available through the use of additional components and / or under special circumstances, please contact us! We will be happy to answer your questions and let you know whether and under what conditions regarding the product and the environmental conditions special functions are realizable. When doubts about the capacity or the performance of our products under special circumstances, we recommend to perform under controlled conditions. Testing activities despite the utmost care, we cannot rule out deviations from illustrations or dimensions, calculation errors, misprints or omissions in this brochure. We therefore accept no liability for the correctness and completeness of the information contained in this brochure. As part of our General Terms and Conditions, we guarantee the proper functioning of our products. Furthermore Linear guarantees we provide in principle. A further liability than outlined in our Terms and Conditions is excluded.

Article number:
P001396OTENV126